

## Memory Module Specifications

### KSM32ES8/8ME

8GB 1Rx8 1G x 72-Bit PC4-3200  
CL22 288-Pin DIMM

#### DESCRIPTION

Kingston's KSM32ES8/8ME is a 1G x 72-bit (8GB) DDR4-3200 CL22 SDRAM (Synchronous DRAM), 1Rx8, ECC, memory module, based on nine 1G x 8-bit FBGA components. The SPD is programmed to JEDEC standard latency DDR4-3200 timing of 22-22-22 at 1.2V. Each 288-pin DIMM uses gold contact fingers. The electrical and mechanical specifications are as follows:

#### FEATURES

- Power Supply: VDD = 1.2V Typical
- VDDQ = 1.2V Typical
- VPP = 2.5V Typical
- VDDSPD = 2.2V to 3.6V
- Nominal and dynamic on-die termination (ODT) for data, strobe, and mask signals
- Low-power auto self refresh (LPASR)
- Data bus inversion (DBI) for data bus
- On-die VREFDQ generation and calibration
- Single-rank
- On-board I<sub>2</sub>S serial presence-detect (SPD) EEPROM
- Temperature sensor with integrated SPD
- 16 internal banks; 4 groups of 4 banks each
- Fixed burst chop (BC) of 4 and burst length (BL) of 8 via the mode register set (MRS)
- Selectable BC4 or BL8 on-the-fly (OTF)
- Fly-by topology
- Terminated control command and address bus
- PCB: Height 1.23" (31.25mm)
- RoHS Compliant and Halogen-Free

#### SPECIFICATIONS

CL(IDD)	22 cycles
Row Cycle Time (tRCmin)	45.75ns(min.)
Refresh to Active/Refresh Command Time (tRFCmin)	350ns(min.)
Row Active Time (tRASmin)	32ns(min.)
Maximum Operating Power	*
UL Rating	94 V - 0
Operating Temperature	0° C to +85° C
Storage Temperature	-55° C to +100° C

\*See IDD Specifications (page 2)

#### Module Assembly

**DRAM: MICRON (E-DIE)**

Continued >>




*continued*

## IDD Specifications

Symbol	3200	Units
I <sub>DD0</sub>	423	mA
I <sub>PP0</sub>	27	mA
I <sub>DD1</sub>	567	mA
I <sub>DD2N</sub>	297	mA
I <sub>DD2NT</sub>	396	mA
I <sub>DD2P</sub>	198	mA
I <sub>DD2Q</sub>	234	mA
I <sub>DD3N</sub>	387	mA
I <sub>PP3N</sub>	27	mA
I <sub>DD3P</sub>	297	mA
I <sub>DD4R</sub>	1602	mA
I <sub>DD4W</sub>	1350	mA
I <sub>DD5R</sub>	450	mA
I <sub>PP5R</sub>	45	mA
I <sub>DD6N</sub>	306	mA
I <sub>DD6E</sub>	522	mA
I <sub>DD6R</sub>	189	mA
I <sub>DD6A</sub>	77.4	mA
I <sub>DD6A</sub>	189	mA
I <sub>DD6A</sub>	279	mA
I <sub>PP6X</sub>	45	mA
I <sub>DD7</sub>	1701	mA
I <sub>PP7</sub>	117	mA
I <sub>DD8</sub>	162	mA

continued

## MODULE DIMENSIONS

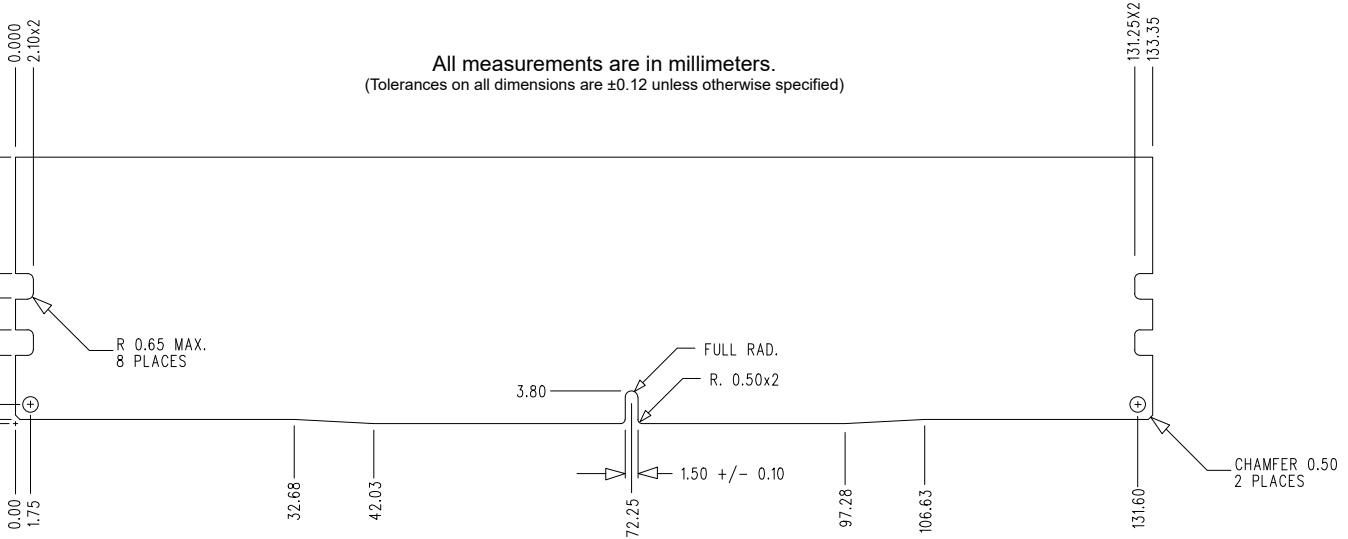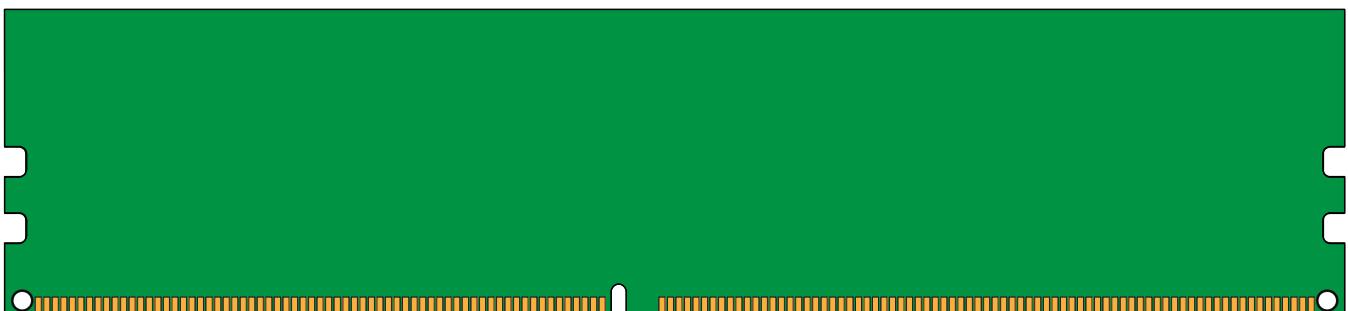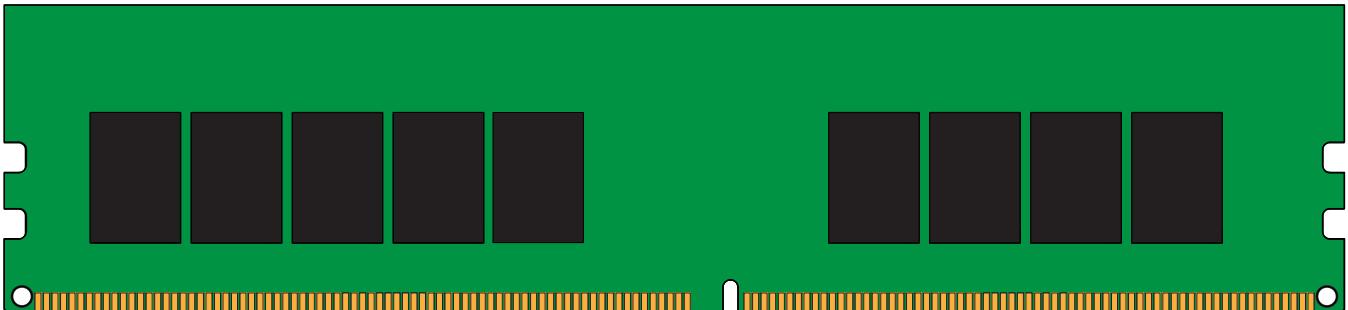

The product images shown are for illustration purposes only and may not be an exact representation of the product.  
Kingston reserves the right to change any information at anytime without notice.