

KVR800D2N6/4G 4GB 512M x 64-Bit DDR2-800 CL6 240-Pin DIMM

DESCRIPTION:

This document describes ValueRAM's 512M x 64-bit 4GB (4096MB) DDR2-800 CL6 SDRAM (Synchronous DRAM) memory module. The components on this module include sixteen 256M x 8-bit DDR2-800 SDRAM in FBGA packages. This 240-pin DIMM uses gold contact fingers and requires +1.8V. The electrical and mechanical specifications are as follows:

FEATURES:

| | |
|---|-------------------------------|
| <input checked="" type="checkbox"/> Clock Cycle Time (tCK) CL=6 | 2.5ns (min.) / 8ns (max.) |
| <input checked="" type="checkbox"/> Row Cycle Time (tRC) | 60ns (min.) |
| <input checked="" type="checkbox"/> Refresh to Active/Refresh Command Time (tRFC) | 195ns |
| <input checked="" type="checkbox"/> Row Active Time (tRAS) | 45ns (min.) / 70,000ns (max.) |
| <input checked="" type="checkbox"/> Single Power Supply of | +1.8V (+/- .1V) |
| <input checked="" type="checkbox"/> Power | 2.232 W (operating) |
| <input checked="" type="checkbox"/> UL Rating | 94 V - 0 |

Note: The module defined in this data sheet is one of several configurations available under this part number. While all configurations are compatible, the DRAM combination and/or the module height may vary from what is described here.

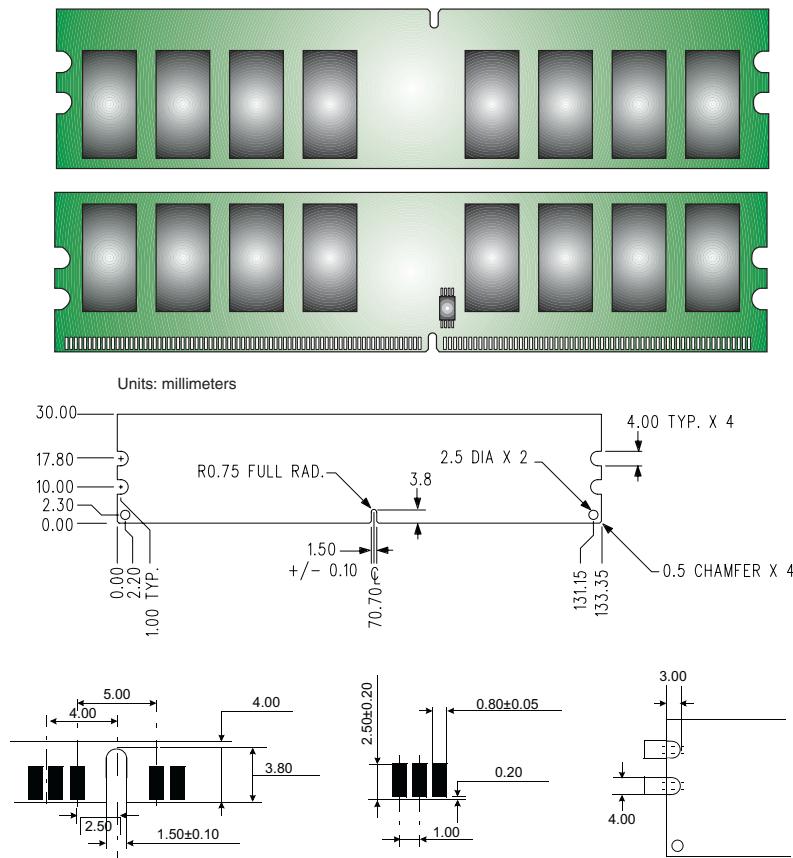


Figure 1: KVR800D2N6/4G 240-Pin DIMM